



The output shaft size can be customized

Dimensionai drawing

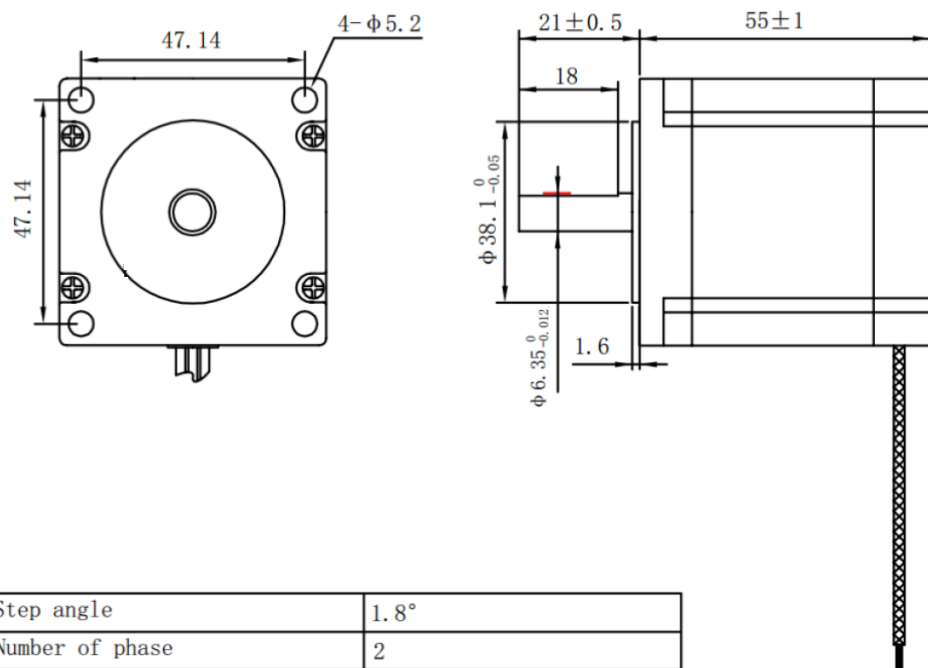

Wiring Diagram




STEP	A+	B+	A-	B-
1	+	+	-	-
2	-	+	+	-
3	-	-	+	+
4	+	-	-	+

CW (Clockwise) and CCW (Counter-clockwise) directions are indicated.

1.Step angle	1.8°
2.Number of phase	2
3.Phase voitage	1.6 VDC
4.Phase current	4.0 Amp
5.Phase resistance	0.4 ohm ±10% (At 2° C)
6.Phase inductance	1.2 mH±20%
7.Static moment	1.2 N.m
8.Insulation class	Class B
9.Insulation resistance	100MΩ min. (500V DC)
10.Ambient temperature	-20° +50°
11.Ambient hum	15% to 95%
12.Motor weight	Approx 0.65 Kg

DC36V 4.0A Driver OK2D656T Haif of PPS

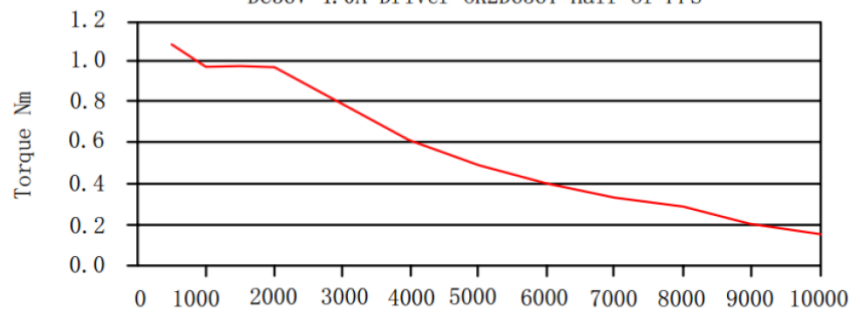

Technology		Unit	mm	Model	57STH56-4004A
Design					
		Scale	1: 1		