

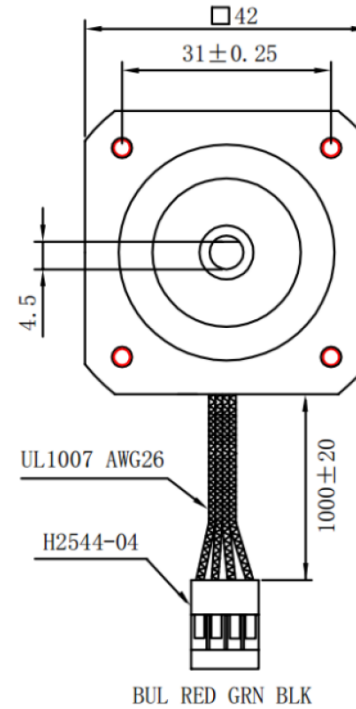
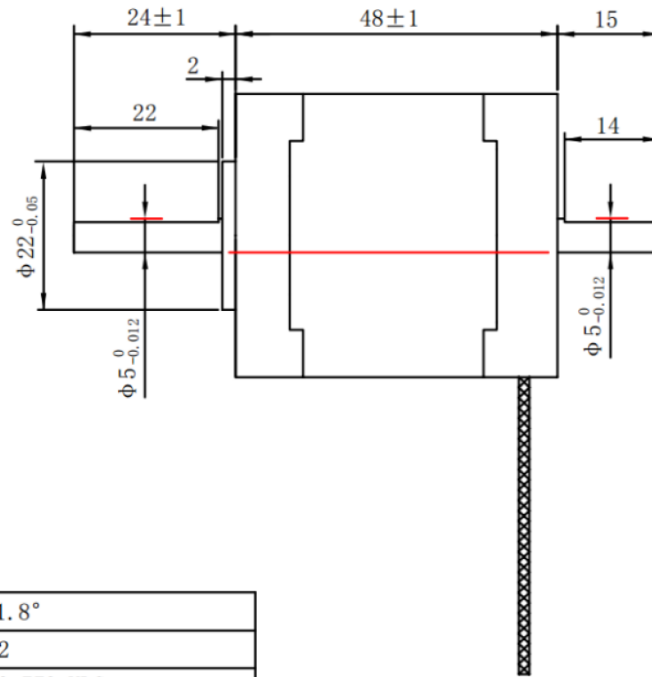


Dimensional drawing

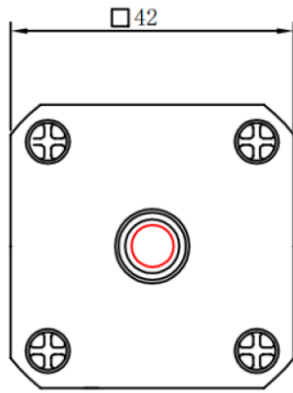



Wiring Diagram



1. Step angle	1.8°
2. Number of phase	2
3. Phase voltage	2.772 VDC
4. Phase current	1.68 Amp
5. Phase resistance	1.65 ±10% (At 2° C)
6. Phase inductance	2.8 mH±20%
7. Static moment	0.46 N.m
8. Insulation class	Class B
9. Insulation resistance	100MΩ min. (500V DC)
10. Ambient temperature	-20° -+50°
11. Ambient hum	15% to 95%
12. Motor weight	Approx 0.4 Kg

DC24V 1.7A Driver OK2D4020 PPS

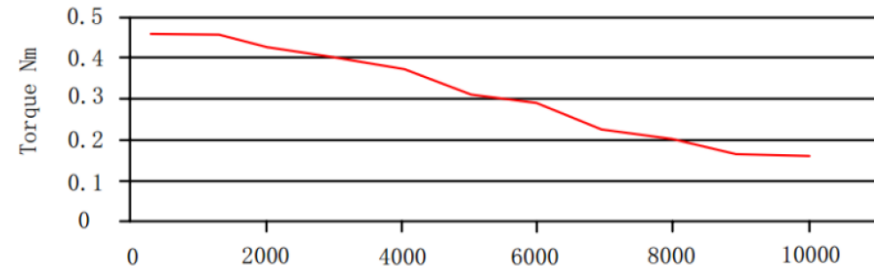

Technology		Unit	mm	Model	42STH47-1684B
Design					
		Scale	1: 1	 www.PoLabs.com	